

Your Specifications for Handy-navi2 Slide Unit


Contact person

Thank you for your inquiry about **Handy-navi2 Slide Unit**. We would like to confirm the specification so please answer below questions and send us back.

1) Trading Company			
Company name			
Department		Position	
Your name		Fax	
E-mail			

2) Manufacturer			
Company name			
Department		Position	
Your name		Fax	
E-mail			

- 3) Power supply frequency – 50Hz 60Hz
- 4) Your spot welding machine — Maker ()
- 5) Squeeze time ———— (cycle)
- 6) Nut feeding method ——— Feeder Manual feed
- 7) Nut feeder ———— Maker ()
- 8) Water hose joint ——— One-touch joint L-shaped hose connector
- 9) Air piping ———— from the feeder from the primary side



- Set the start-up self-hold on the welding machine to activate when the current starts to flow.
- Upper tip needs clearance for guide pin.
- Please provide us 5 pcs. each of nut samples.

10) Specification 1

- Nut size (M)
- Nut shape
- Square Hex Round
- Flange type T-nut
- Hex cap nut Other ()
- Hole diameter of work ϕ and board thickness t


Board thickness t

Hole ϕ

• (ϕ) (t)

• (ϕ) (t)

• (ϕ) (t)



11) Specification 2

- Nut size (M)
- Nut shape
- Square Hex Round
- Flange type T-nut
- Hex cap nut Other ()
- Hole diameter of work ϕ and board thickness t


Board thickness t

Hole ϕ

• (ϕ) (t)

• (ϕ) (t)

• (ϕ) (t)



12) Specification 3

- Nut size (M)
- Nut shape
- Square Hex Round
- Flange type T-nut
- Hex cap nut Other ()
- Hole diameter of work ϕ and board thickness t


Board thickness t

Hole ϕ


• (ϕ) (t)

• (ϕ) (t)

• (ϕ) (t)




13) Dimensions of Holder and Horn

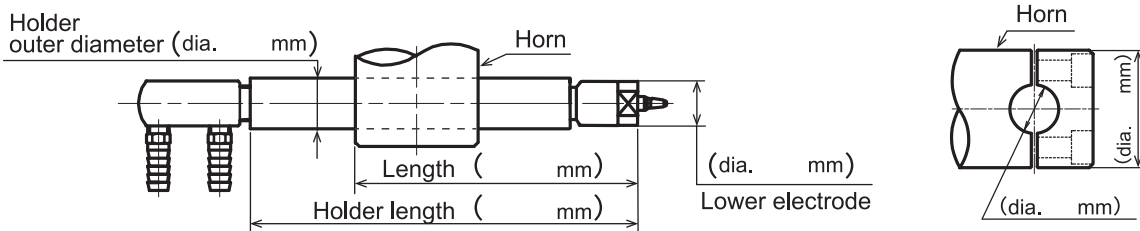


14) The shape of metal connector and number of pins of the foot-operated switch or the connector between nut feeder and welding machine in use.


Please answer below questions only when using a controller for manual operation.




2P (female)



3P (female)



Rectangular Connector #



Connecting specification, Outside Japan /Screwless terminal block

If you select a rectangular connector, please send us a photo and electrical drawing to confirm start signal.

Example

Fax this to SMK Co., Ltd at Fax: +81-42-703-0026

Date: / /

E-mail : smk_overseas@e-smk.co.jp

Your Specifications for Handy-navi2 Slide Unit

Thank you for your inquiry about **Handy-navi2 Slide Unit**. We would like to confirm the specification so please answer below questions and send us back.

Contact person

Write your full name.

When step on the foot-operated switch for a moment,
 1. Pressurization is released immediately.
 →Self-hold works with starting of energization.
 2. Pressurization is not released.
 →Self-hold works since the squeeze time.

1) Trading Company				2) Manufacturer			
Company name	Trading Company name			Company name	Manufacturer Company name		
Department	Department	Position	Position	Department	Position	Position	Position
Your name	First and last name	Fax	+XX-XXXXXXXXXX	Your name	First and last name	Fax	+XX-XXXXXXXXXX
E-mail	XXXXX@XXX			E-mail	XXXXX@XXX		

- 3) Power supply frequency – 50Hz 60Hz
 4) Your spot welding machine — Maker (**Maker name**)
 5) Squeeze time — (**20** cycle)
 6) Nut feeding method — Feeder Manual feed
 7) Nut feeder — Maker (**Maker name**)
 8) Water hose joint — One-touch joint L-shaped hose connector
 9) Air piping — from the feeder from the primary side


⚠
 • Set the start-up self-hold on the welding machine to activate when the current starts to flow.
 • Upper tip needs clearance for guide pin.
 • Please provide us 5 pcs. each of nut samples.

We will manufacture the slide unit to fit sample nut you supplied to us.

10) Specification 1	11) Specification 2	12) Specification 3
• Nut size (M 6)	• Nut size (M 8)	• Nut size (M)
• Nut shape	• Nut shape	• Nut shape
<input checked="" type="checkbox"/> Square <input type="checkbox"/> Hex <input type="checkbox"/> Round	<input checked="" type="checkbox"/> Square <input type="checkbox"/> Hex <input type="checkbox"/> Round	<input type="checkbox"/> Square <input type="checkbox"/> Hex <input type="checkbox"/> Round
<input type="checkbox"/> Flange type <input type="checkbox"/> T-nut	<input type="checkbox"/> Flange type <input type="checkbox"/> T-nut	<input type="checkbox"/> Flange type <input type="checkbox"/> T-nut
<input type="checkbox"/> Hex cap nut <input type="checkbox"/> Other ()	<input type="checkbox"/> Hex cap nut <input type="checkbox"/> Other ()	<input type="checkbox"/> Hex cap nut <input type="checkbox"/> Other ()
• Hole diameter of work ϕ and board thickness t	• Hole diameter of work ϕ and board thickness t	• Hole diameter of work ϕ and board thickness t
Board thickness t Hole ϕ • (ϕ 7) (t 1.6)	Board thickness t Hole ϕ • (ϕ 9) (t 1.2)	Board thickness t Hole ϕ • (ϕ) (t)



13) Dimensions of Holder and Horn

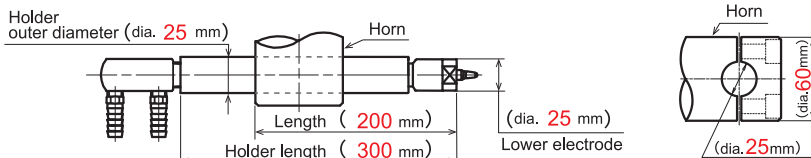

14) The shape of metal connector and number of pins of the foot-operated switch or the connector between nut feeder and welding machine in use.


Please answer below questions only when using a controller for manual operation.

Spot welding machine → Foot-operated switch

OD (dia. **22**mm) OD (dia. mm) Number of pins (P) Cable connection

2P (female) 3P (female) Rectangular Connector # Connecting specification, Outside Japan /Screwless terminal block


If you select a rectangular connector, please send us a photo and electrical drawing to confirm start signal.

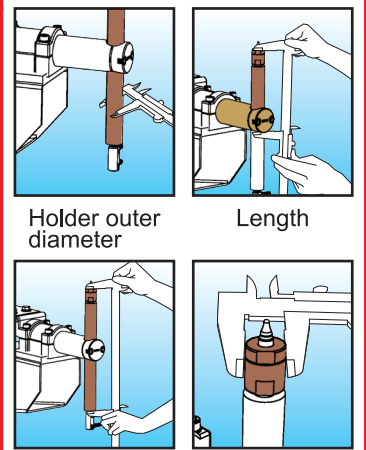


17 ※Contact us if you have any questions. E-mail : smk_overseas@e-smk.co.jp Fax: +81-42-703-0026



Check the bottom of the welding machine. If you use a nut feeder, check the connector between nut feeder and welding machine.



Please take a picture so that we can see the size of a connector and the number of pins.

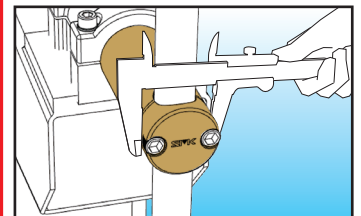

Horn outer diameter