

Your Specifications for Platen-navi Unit

Contact person

Thank you for your inquiry about **Platen-navi Unit**. We would like to confirm the specification so please answer below questions and send us back.

1) Trading Company			
Company name			
Department		Position	
Your name		Fax	
E-mail			

2) Manufacturer			
Company name			
Department		Position	
Your name		Fax	
E-mail			

- 3) Power supply frequency – 50Hz 60Hz
- 4) Your spot welding machine — Maker ()
- 5) Squeeze time — (cycle)
- 6) Bolt feeding method — Feeder Manual feed
- 7) Bolt feeder — Maker ()
- 8) Water hose joint — Rotary hose connector
- 9) Air piping — from the feeder from the primary side

- Set the start-up self-hold on the welding machine to activate when the current starts to flow.
- Please provide us 5 pcs. each of bolt samples.

10) Specification 1

- Bolt size (M)
- Below the head (mm)
- Hole diameter of work ϕ and board thickness t

Board thickness t	Hole ϕ	• (ϕ) (t)
		• (ϕ) (t)
		• (ϕ) (t)

11) Specification 2

- Bolt size (M)
- Below the head (mm)
- Hole diameter of work ϕ and board thickness t

Board thickness t	Hole ϕ	• (ϕ) (t)
		• (ϕ) (t)
		• (ϕ) (t)

12) Specification 3

- Bolt size (M)
- Below the head (mm)
- Hole diameter of work ϕ and board thickness t

Board thickness t	Hole ϕ	• (ϕ) (t)
		• (ϕ) (t)
		• (ϕ) (t)

13) Select an optional part.

Taper base (dia. mm)

1/10
 1/5
 MT#2

Flange base

Not required

14) The shape of metal connector and number of pins of the foot-operated switch or the connector between nut feeder and welding machine in use.

Spot welding machine

Foot-operated switch

OD (dia. mm)

2P (female)

OD (dia. mm)

3P (female)

Number of pins (P)

Width ()

Rectangular Connector #

Cable connection

Connecting specification, Outside Japan /Screwless terminal block

If you select a rectangular connector, please send us a photo and electrical drawing to confirm start signal.

Example

Fax this to SMK Co., Ltd at Fax: +81-42-703-0026

Date: / /

E-mail : smk_overseas@e-smk.co.jp

Your Specifications for Platen-navi Unit

Thank you for your inquiry about **Platen-navi Unit**. We would like to confirm the specification so please answer below questions and send us back.

Contact person

1) Trading Company				2) Manufacturer			
Company name	Trading Company name			Company name	Manufacturer Company name		
Department	Department	Position	Position	Department	Department	Position	Position
Your name	First and last name	Fax	+XX-XXXXXXXXXX	Your name	First and last name	Fax	+XX-XXXXXXXXXX
E-mail	XXXXX@XXX			E-mail	XXXXX@XXX		

Write your full name.


When step on the foot-operated switch for a moment,
 1. Pressurization is released immediately.
 →Self-hold works with starting of energization.
 2. Pressurization is not released.
 →Self-hold works since the squeeze time.

- 3) Power supply frequency — 50Hz 60Hz
- 4) Your spot welding machine — Maker (**Maker name**)
- 5) Squeeze time — (**20** cycle)
- 6) Bolt feeding method — Feeder Manual feed
- 7) Bolt feeder — Maker (**Maker name**)
- 8) Water hose joint — Rotary hose connector
- 9) Air piping — from the feeder from the primary side

⚠
 • Set the start-up self-hold on the welding machine to activate when the current starts to flow.
 • Please provide us 5 pcs. each of bolt samples.

We will manufacture the slide unit to fit sample bolt you supplied to us.

10) Specification 1	11) Specification 2	12) Specification 3																											
<ul style="list-style-type: none"> • Bolt size (M 6) • Below the head (15 mm) • Hole diameter of work ϕ and board thickness t <table border="1"> <tr> <td>Board thickness t</td> <td>Hole ϕ</td> <td>• (ϕ 6.2) (t 1.6)</td> </tr> <tr> <td></td> <td></td> <td>• (ϕ) (t)</td> </tr> <tr> <td></td> <td></td> <td>• (ϕ) (t)</td> </tr> </table>	Board thickness t	Hole ϕ	• (ϕ 6.2) (t 1.6)			• (ϕ) (t)			• (ϕ) (t)	<ul style="list-style-type: none"> • Bolt size (M 8) • Below the head (20 mm) • Hole diameter of work ϕ and board thickness t <table border="1"> <tr> <td>Board thickness t</td> <td>Hole ϕ</td> <td>• (ϕ 8.2) (t 1.2)</td> </tr> <tr> <td></td> <td></td> <td>• (ϕ) (t)</td> </tr> <tr> <td></td> <td></td> <td>• (ϕ) (t)</td> </tr> </table>	Board thickness t	Hole ϕ	• (ϕ 8.2) (t 1.2)			• (ϕ) (t)			• (ϕ) (t)	<ul style="list-style-type: none"> • Bolt size (M) • Below the head () mm) • Hole diameter of work ϕ and board thickness t <table border="1"> <tr> <td>Board thickness t</td> <td>Hole ϕ</td> <td>• (ϕ) (t)</td> </tr> <tr> <td></td> <td></td> <td>• (ϕ) (t)</td> </tr> <tr> <td></td> <td></td> <td>• (ϕ) (t)</td> </tr> </table>	Board thickness t	Hole ϕ	• (ϕ) (t)			• (ϕ) (t)			• (ϕ) (t)
Board thickness t	Hole ϕ	• (ϕ 6.2) (t 1.6)																											
		• (ϕ) (t)																											
		• (ϕ) (t)																											
Board thickness t	Hole ϕ	• (ϕ 8.2) (t 1.2)																											
		• (ϕ) (t)																											
		• (ϕ) (t)																											
Board thickness t	Hole ϕ	• (ϕ) (t)																											
		• (ϕ) (t)																											
		• (ϕ) (t)																											

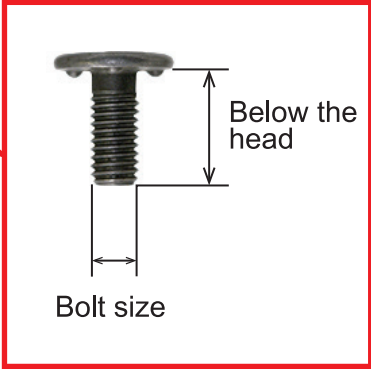

13) Select an optional part.

<input checked="" type="checkbox"/> Taper base (dia. 16 mm)	<input type="checkbox"/> Flange base
<input checked="" type="checkbox"/> 1/10 <input type="checkbox"/> 1/5 <input type="checkbox"/> MT#2	<input type="checkbox"/> Not required

If you select a taper base, fill in the outer diameter of taper and also select an angle of taper.

14) The shape of metal connector and number of pins of the foot-operated switch or the connector between nut feeder and welding machine in use.

	<input type="checkbox"/> 2P (female)	<input type="checkbox"/> 3P (female)	<input type="checkbox"/> Rectangular Connector #	<input checked="" type="checkbox"/> Connecting specification, Outside Japan /Screwless terminal block

If you select a rectangular connector, please send us a photo and electrical drawing to confirm start signal.

